

Wire your Long Range Receiver

Follow these wiring instructions to hook your LRGOR to any Apollo 635/636 or 835/836 control board.

Gather the included parts. Your kit includes 4 wires of different colors. It doesn't matter which wires you use to hook up your units - they are color coded for convenient identification.

Step 1:


Follow the lines to connect your receiver to the J8 block.

Wire #6 to Input.

Wire #7 to Ground.

Wire #11 to Ground.

Wire #12 to 12V.

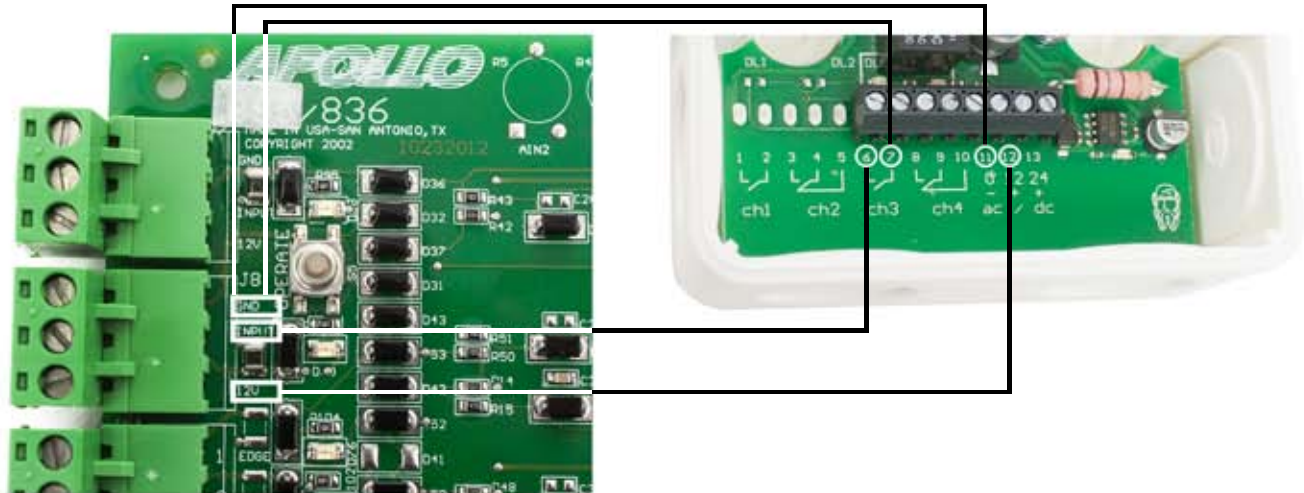

Step 2:

Strip the antenna wire and connect it to the receiver.

Wire antenna's center wire to #14.

Wire antenna's outside wire to #15.

Step 3:

Press and hold the red button on the receiver.

A red light will turn on.

Step 4:

Press and hold the LRGOT transmitter until the light goes off. If your gate opens, you have successfully programmed your gate!

